

CD DRUM

200L


The CD Drum is a high-quality and reusable drum with hazardous goods approval in the EX area. That makes it capable for handling of high-purity and flammable applications in the chemical, pharmaceutical and semiconductor industries.

Benefits

- Very low content of trace metals and particles in the inner liner – semiconductor grade < 100 ppt
- Traceability identification label
- Double L-Ring, for high stability and easier handling
- High vapor pressure
- Minimal residual liquid
- UN approved Y Packaging Group II, 150 kpa tested
- Elec. Conductive 10⁶ Ohm
- Recyclable



Maximum safety with RIKUTEC-Solutions

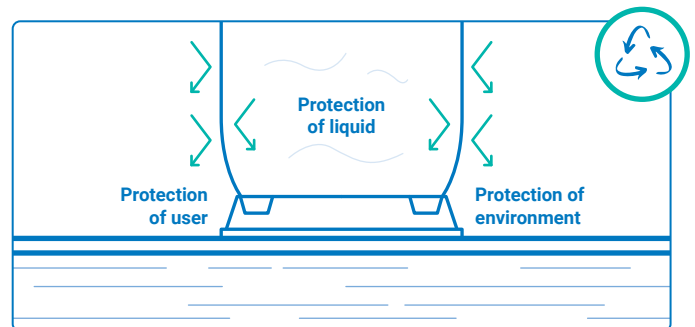

Accessories



1 Dip tube S62x5

- suitable for flammable liquids
- available with compensator for better chemical dispensing
- key-coded system filling and extraction



2 QC connector head for S62x5

- suitable for flammable liquids
- Availability of simultaneously filling and extraction

TECHNICAL DATA SHEET

CD DRUM 200L

Specifications	CD Drum
Material inner layer	HDPE
Material outer layer	HDPE, carbon added
Transport quantity	192 (Europe) or 176 (USA) per truck (8 per Pallet) 208 per Container 40'
Bungs	2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented)
Standard color	Carbon black
Nominal capacity	200 liter / approx. 53 gal.
Height	581 x 955mm / approx. 22.9 x 37.6 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 16,5 kg / approx. 35.3 lb.
Prepared for extractor tubes	Quick Connect System
Approvals	
UN certification	1H1/Y/150/D/BAM 7369 - RIKUTEC
Standard liquid approvals	Density kg/l
Water	1.2
Butyl acetat	1.2
White Spirit	1.2

Rikutec Germany

RIKUTEC Germany GmbH & Co. KG
Graf-Zeppelin-Straße 1-5
57610 Altenkirchen | Germany
T +49 2681 9546 0 | F +49 2681 9546 33
info@rikutec.de | www.rikutec.de

Rikutec America

371 Douglas Road
Whitinsville MA, 01588 | USA
T +1 508 234 7300 | F +1 508 234 7337
info@rikutec.com | www.rikutec.com

Rikutec Asia

Room 704, 7. Fl., Shinwon Plaza, 85
Dokseodang-ro | Yongsan-gu
Seoul 04419 | Republik Korea
T +82 2 797 0701
info@rikutec.asia | www.rikutec.asia